


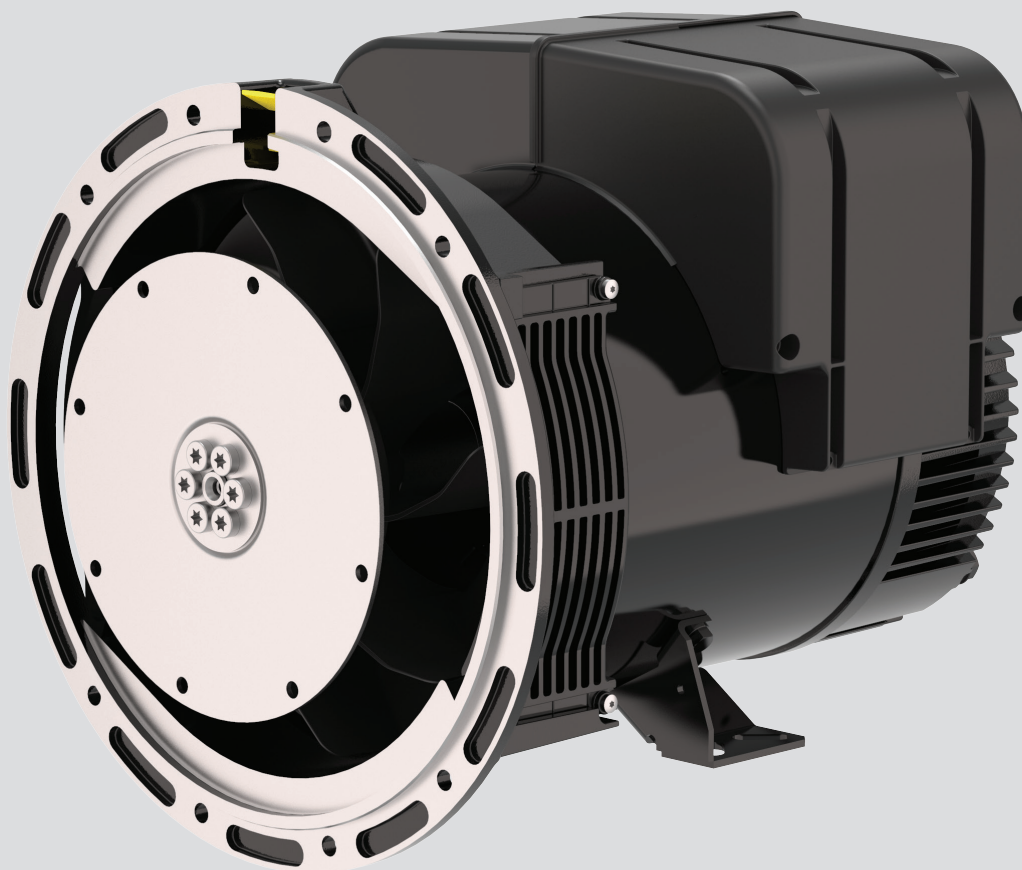

TAL 040

Low Voltage Alternator - 4 pole

Three-phase 10 to 20 kVA - 50 Hz / 12.5 to 25 kVA - 60 Hz

Dedicated single-phase 10.5 to 16 kVA - 50 Hz / 11.5 to 17.5 kVA - 60 Hz

Electrical and mechanical data

LEROY-SOMER™

Nidec
All for dreams

TAL 040 - Three-phase & Single-phase

Adapted to needs

The TAL alternator range is designed to meet the needs of general applications such as prime power and stand-by.

Compliant with international standards

The TAL range complies with international standards and regulations: IEC 60034 and derivative.

The range is designed, manufactured and marketed in an ISO 9001 and 14001 environment.

Electrical design

- Class H insulation
- Shunt excitation
- Low voltage winding:
 - Three-phase 50 Hz: 380V - 400V - 415V - 440V / 220V - 230V - 240V
 - 60 Hz: 380V - 416V - 440V - 480V / 220V - 208V - 240V
- Single-phase 50 Hz: 115V - 230V
- 60 Hz: 120V - 240V
- 4-terminal plates in 6-wire version
- Optimized performance

Robust design

- Compact and rugged assembly to withstand engine vibrations
- Steel frame
- Aluminum flanges and shields
- Single bearing design compatible with most diesel engines
- Sealed for life single bearing
- Direction of rotation: clockwise and counterclockwise without derating



Excitation and regulation system suited to the application

	Excitation system			Regulation options	
	AVR	SHUNT	AREP (option)	ULc/us	Remote voltage potentiometer
Three-phase 6-wire	R120	Standard			
	R150	Option			√
	R180		Standard		√
	D350	Option	Option	√	√
Three-phase 12-wire	R120	Standard			
	R220	Option		√	√
	R180		Standard		√
	D350		Option	√	√
Single-phase	R121	Standard			√
	R221	Option		√	√

√ : Possible option

Compact terminal box

- Easy access to AVR and terminals

Environment and protection

- IP Code IP 23
- Standard winding protection for non-harsh environment with relative humidity $\leq 95\%$

Available options

- Three-phase 12-wire with 8-terminal plates
- AREP excitation
- ULc/us
- Customized painting (machine not painted as standard)
- Space heaters
- Flying leads
- Dedicated single-phase
- Winding 8 optimized for three-phase 380V / 416V - 60Hz
- Winding protection for harsh environments and relative humidity greater than 95% (system 2 - 4 without derating)

TAL 040 - Three-phase 10 to 20 kVA - 50 Hz / 12.5 to 25 kVA - 60 Hz

General characteristics

Insulation class	H	Excitation system 6-wire	SHUNT	AREP
Winding pitch	2/3 (wind.6S - 6-wire / wind.6 -12-wire)	AVR type	R120	R180
Number of wires	6-wire (12-wire option)	Excitation system 12-wire (option)	SHUNT	AREP
Protection	IP 23	AVR type	R120	R180
Altitude	≤ 1000 m	Voltage regulation (*)	± 1 %	
Overspeed	2250 R.P.M.	Total Harmonic Distortion THD (**) in no-load	< 3.5 %	
Air flow 50 Hz (m³/s)	0.06	Total Harmonic Distortion THD (**) in linear load	< 5 %	
Air flow 60 Hz (m³/s)	0.07	Waveform: NEMA = TIF (**)	< 50	
AREP Short-circuit current = 2.7 In: 5 second		Waveform: I.E.C. = FHT (**)	< 2%	

(*) Steady state (**) Total harmonic distortion between phases, no-load or on-load (non-distorting)

Ratings 50 Hz - 1500 R.P.M.

kVA / kW - P.F. = 0.8																					
Duty / T° C		Continuous / 40 °C					Continuous / 40 °C					Stand-by / 40 °C					Stand-by / 27 °C				
Class / T° K		H / 125° K					F / 105° K					H / 150° K					H / 163° K				
Phase		3 ph.			1 ph.	3 ph.			1 ph.	3 ph.			1 ph.	3 ph.			1 ph.				
Y		380V	400V	415V	440V		380V	400V	415V	440V		380V	400V	415V	440V		380V	400V	415V	440V	
Δ		220V	230V	240V		230V	220V	230V	240V		230V	220V	230V	240V		230V	220V	230V	240V		230V
YY (*)		220V					220V					220V					220V				
ΔΔ (*)						230V					230V					230V					230V
TAL 040 B	kVA	10	10	10	9	7	9	9	9	8	6.5	10.5	10.5	10.5	9.5	7.5	11	11	11	10	7.5
	kW	8	8	8	7	5.5	7	7	7	6.5	5	8.5	8.5	8.5	7.5	6	9	9	9	8	6
TAL 040 C	kVA	12.5	12.5	12.5	11	9	11.5	11.5	11.5	10	8	13.5	13.5	13.5	11.5	9.5	14	14	14	12	10
	kW	10	10	10	9	7	9	9	9	8	6.5	11	11	11	9	7.5	11	11	11	9.5	8
TAL 040 D	kVA	15	15	15	13	10.5	14	14	14	12	9.5	16	16	16	14	11	16.5	16.5	16.5	14.5	11.5
	kW	12	12	12	10.5	8.5	11	11	11	9.5	7.5	13	13	13	11	9	13	13	13	11.5	9
TAL 040 E	kVA	17.5	17.5	17.5	16	12.5	16	16	16	14.5	11.5	18.5	18.5	18.5	17	13.5	19.5	19.5	19.5	17.5	14
	kW	14	14	14	13	10	13	13	13	11.5	9	15	15	15	13.5	11	15.5	15.5	15.5	14	11
TAL 040 F	kVA	20	20	20	18	14	18	18	18	16.5	13	21	21	21	19	15	22	22	22	20	15.5
	kW	16	16	16	14.5	11	14.5	14.5	14.5	13	10.5	17	17	17	15	12	17.5	17.5	17.5	16	12.5






(*) 12-wire option

Ratings 60 Hz - 1800 R.P.M.

kVA / kW - P.F. = 0.8																					
Duty / T° C		Continuous / 40 °C					Continuous / 40 °C					Stand-by / 40 °C					Stand-by / 27 °C				
Class / T° K		H / 125° K					F / 105° K					H / 150° K					H / 163° K				
Phase		3 ph.			1 ph.	3 ph.			1 ph.	3 ph.			1 ph.	3 ph.			1 ph.				
Y		380V	416V	440V	480V		380V	416V	440V	480V		380V	416V	440V	480V		380V	416V	440V	480V	
Δ		220V	240V			240V	220V	240V			240V	220V	240V			240V	220V	240V		240V	
YY (*)		208V	220V	240V			208V	220V	240V			208V	220V	240V			208V	220V	240V		
ΔΔ (*)						240V					240V					240V				240V	
TAL 040 B	kVA	10	11	11.5	12.5	9	9	10	10.5	11.5	8	10.5	11.5	12	13.5	9.5	11	12	12.5	14	10
	kW	8	9	9	10	7	7	8	8.5	9	6.5	8.5	9	9.5	11	7.5	9	9.5	10	11	8
TAL 040 C	kVA	12.5	13.5	14.5	15.5	11.5	11.5	12.5	13	14	10.5	13.5	14.5	15.5	16.5	12	14	15	16	17	12.5
	kW	10	11	11.5	12.5	9	9	10	10.5	11	8.5	11	11.5	12.5	13	9.5	11	12	13	13.5	10
TAL 040 D	kVA	15	16.5	17.5	19	13	13.5	15	16	17.5	12	16	17.5	18.5	20	14	16.5	18	19.5	21	14.5
	kW	12	13	14	15	10.5	11	12	13	14	9.5	13	14	15	16	11	13	14.5	15.5	17	11.5
TAL 040 E	kVA	17.5	19	20	22	14.5	16	17.5	18	20	13	18.5	20	21	23.5	15.5	19.5	21	22	24	16
	kW	14	15	16	17.5	11.5	13	14	14.5	16	10.5	15	16	17	19	12.5	15.5	17	17.5	19	13
TAL 040 F	kVA	20	22	23	25	16	18	20	21	23	14.5	21	23.5	24.5	26.5	17	22	24	25.5	27.5	17.5
	kW	16	17.5	18.5	20	13	14.5	16	17	18.5	11.5	17	19	19.5	21	13.5	17.5	19	20.5	22	14

(*) 12-wire option

Efficiencies 400 V - 50 Hz (— P.F.: 0.8) (..... P.F.: 1)

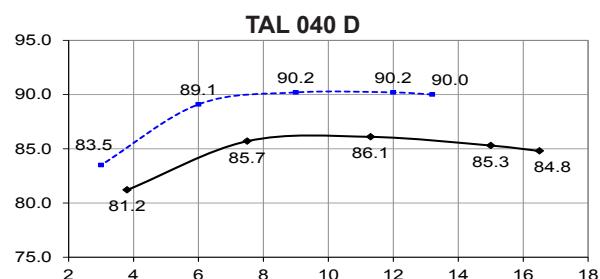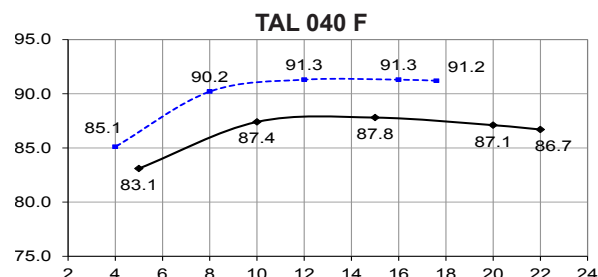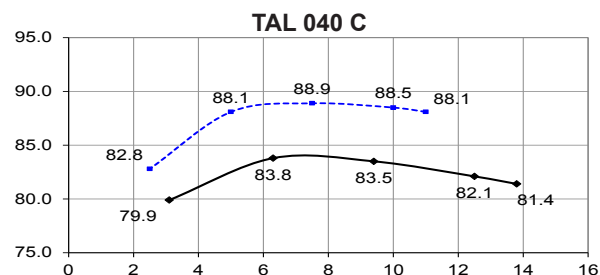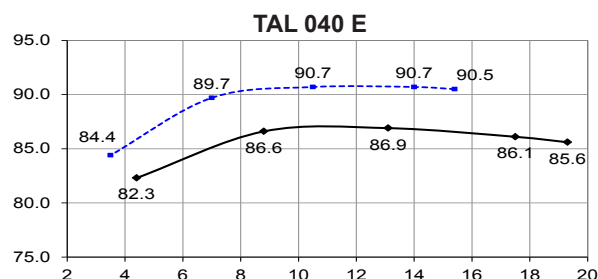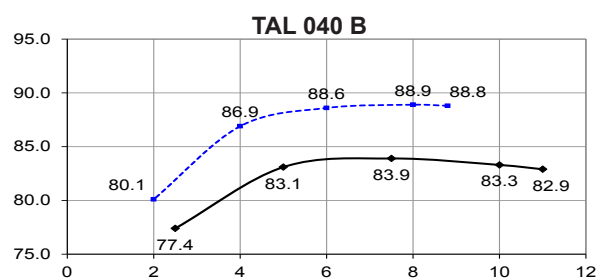

Reactances (%). Time constants (ms) - Class H / 400 V




	B	C	D	E	F
Kcc Short-circuit ratio	0.7	0.56	0.6	0.6	0.61
Xd Direct-axis synchro. reactance unsaturated	167	209	190	195	193
Xq Quadrature-axis synchro. reactance unsaturated	85	106	97	99	98
T'do No-load transient time constant	719	719	837	878	926
X'd Direct-axis transient reactance saturated	17.2	21.5	16.8	16.4	15.4
T'd Short-circuit transient time constant	74	74	74	74	74
X''d Direct-axis subtransient reactance saturated	8.6	10.7	8.4	8.2	7.7
T''d Subtransient time constant	7	7	7.4	7	7
X''q Quadrature-axis subtransient reactance saturated	16.1	20.1	16.8	16.8	16.2
Xo Zero sequence reactance	0.71	0.89	0.7	0.68	0.64
X2 Negative sequence reactance saturated	12.36	15.45	12.66	12.55	12.01
Ta Armature time constant	11	11	11	11	11

Other class H / 400 V data

io (A) No-load excitation current SHUNT/AREP	0.77 / 1.06	0.77 / 1.06	0.76 / 1.03	0.75 / 1.03	0.72 / 0.98
ic (A) On-load excitation current SHUNT/AREP	1.94 / 2.65	2.3 / 3.14	2.05 / 2.79	2.06 / 2.8	1.95 / 2.66
uc (V) On-load excitation voltage SHUNT/AREP	23.7 / 17.1	28 / 20.2	24.9 / 17.9	24.9 / 18	23.6 / 17
ms Response time ($\Delta U = 20\%$ transient)	500	500	500	500	500
kVA Start ($\Delta U = 20\%$ cont. or $\Delta U = 30\%$ trans.) *	18.3	18.3	28	33.6	40.8
% Transient ΔU (on-load 4/4) - P.F.: 0.8 _{LAG}	18	20.5	17.8	17.5	16.9
W No-load losses	461	461	540	590	645
W Heat dissipation	1597	2172	2063	2255	2352






* P.F. = 0.6

Transient voltage variation 400V - 50 Hz

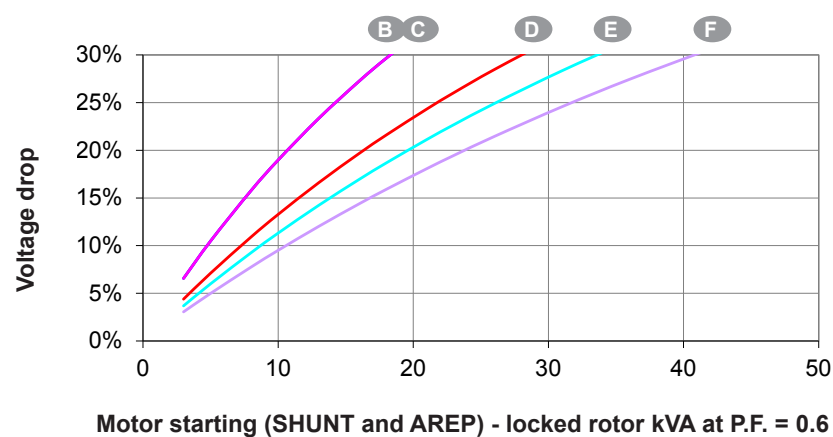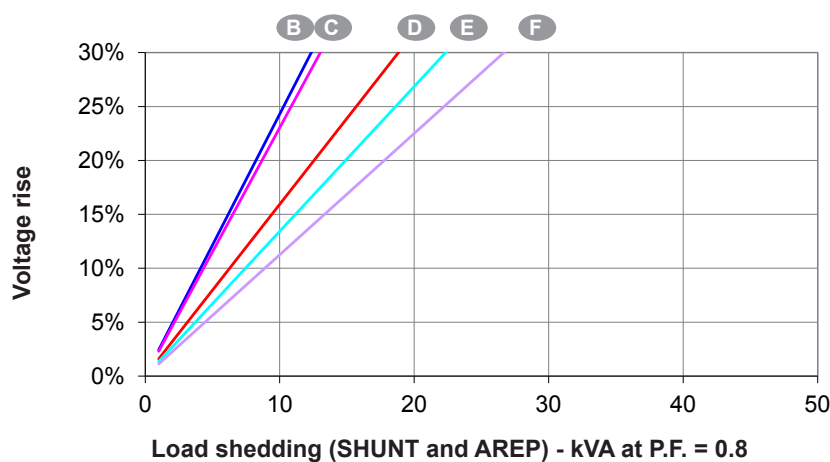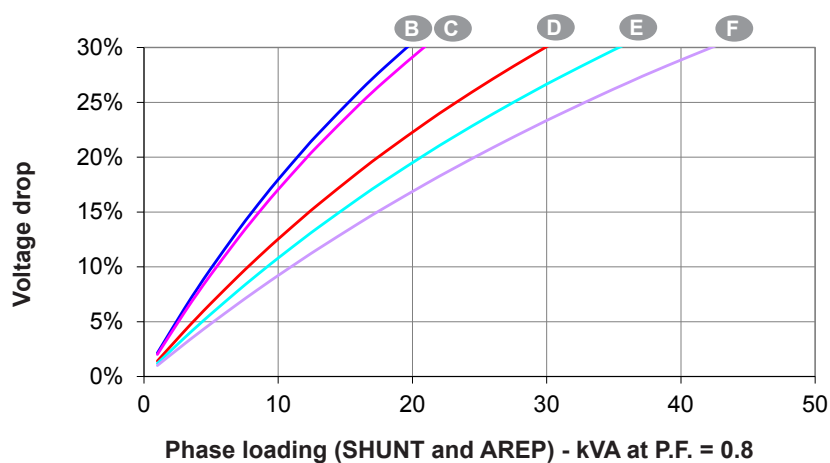

- 1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by $K = \text{Sine P.F.} / 0.8$
- 2) For voltages other than 400V (Y), 230V (Δ) at 50 Hz, then kVA must be multiplied by $(400/U)^2$ or $(230/U)^2$.

Efficiencies 480 V - 60 Hz (— P.F.: 0.8) (..... P.F.: 1)

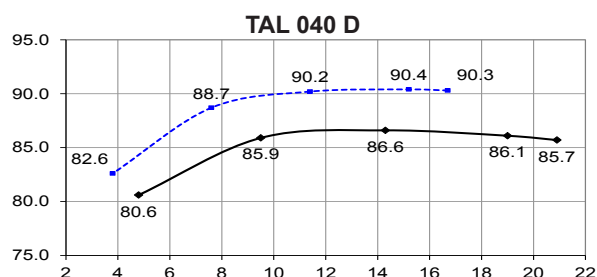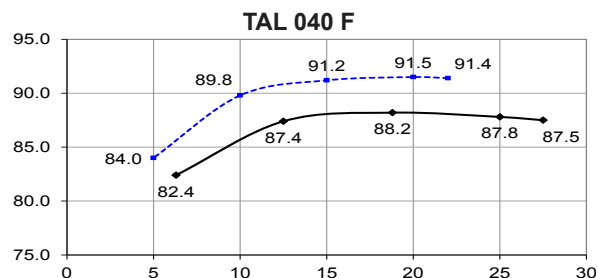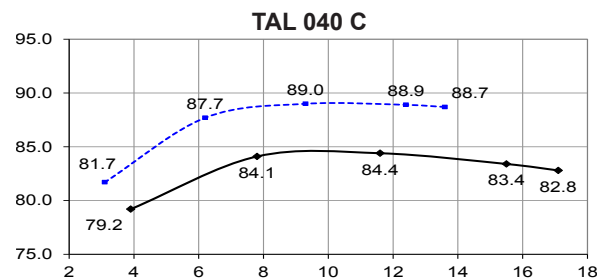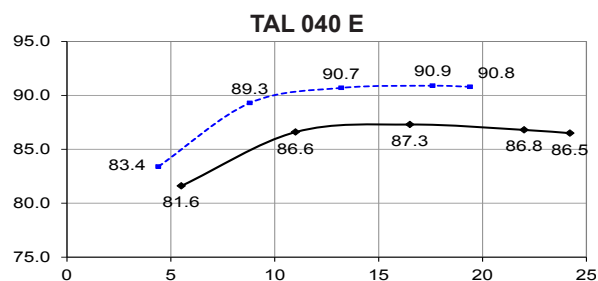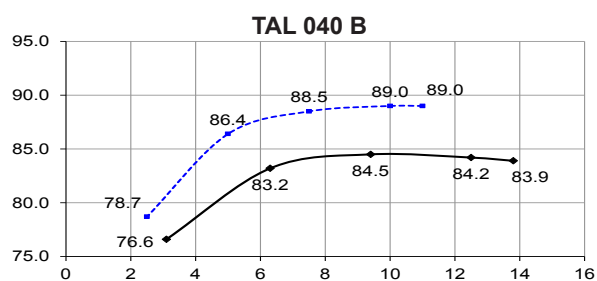

Reactances (%). Time constants (ms) - Class H / 480 V


		B	C	D	E	F
Kcc	Short-circuit ratio	0.67	0.54	0.57	0.57	0.58
Xd	Direct-axis synchro. reactance unsaturated	174	216	201	204	201
Xq	Quadrature-axis synchro. reactance unsaturated	88	110	102	104	102
T'do	No-load transient time constant	719	719	837	878	926
X'd	Direct-axis transient reactance saturated	17.9	22.2	17.8	17.2	16.1
T'd	Short-circuit transient time constant	74	74	74	74	74
X''d	Direct-axis subtransient reactance saturated	8.9	11.1	8.9	8.6	8
T''d	Subtransient time constant	7	7	7.4	7	7
X''q	Quadrature-axis subtransient reactance saturated	16.7	20.7	17.8	17.6	16.9
Xo	Zero sequence reactance	0.74	0.92	0.74	0.71	0.67
X2	Negative sequence reactance saturated	12.87	15.96	13.36	13.15	12.51
Ta	Armature time constant	11	11	11	11	11

Other class H / 480 V data


io (A)	No-load excitation current SHUNT/AREP	0.77 / 1.06	0.77 / 1.06	0.76 / 1.03	0.75 / 1.02	0.72 / 0.98
ic (A)	On-load excitation current SHUNT/AREP	1.97 / 2.69	2.33 / 3.17	2.1 / 2.86	2.1 / 2.86	1.97 / 2.69
uc (V)	On-load excitation voltage SHUNT/AREP	24.1 / 17.4	28.4 / 20.5	25.6 / 18.5	25.5 / 18.4	24 / 17.3
ms	Response time ($\Delta U = 20\%$ transient)	500	500	500	500	500
kVA	Start ($\Delta U = 20\%$ cont. or $\Delta U = 30\%$ trans.) *	21.9	22	33.6	40.3	48.9
%	Transient ΔU (on-load 4/4) - P.F.: 0.8 _{LAG}	18.4	20.9	18.3	18	17.3
W	No-load losses	643	643	755	825	904
W	Heat dissipation	1866	2464	2447	2654	2763

* P.F. = 0.6


Transient voltage variation 480V - 60 Hz

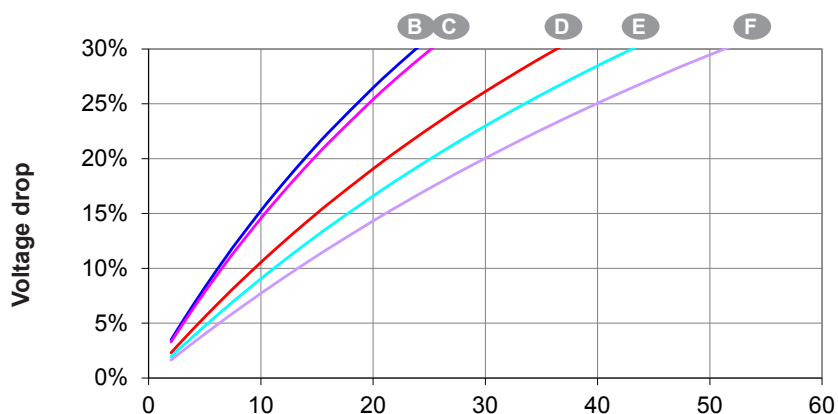

Phase loading (SHUNT and AREP) - kVA at P.F. = 0.8

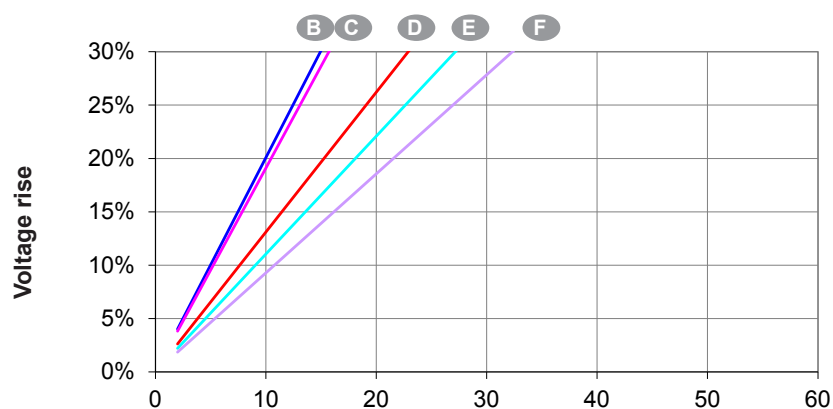

Load shedding (SHUNT and AREP) - kVA at P.F. = 0.8

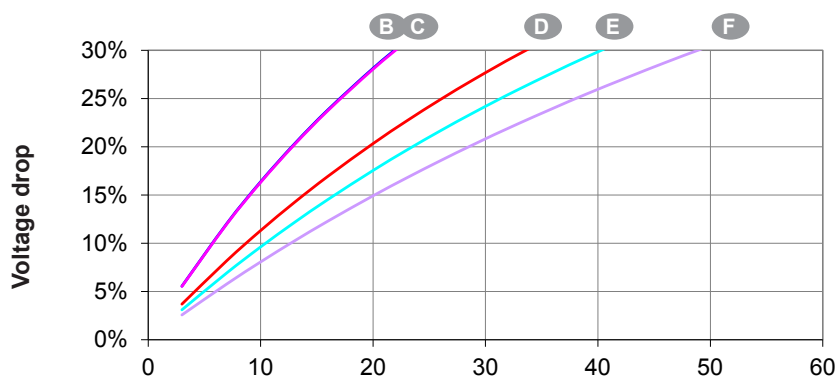


Motor starting (SHUNT and AREP) - locked rotor kVA at P.F. = 0.6

- 1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by $K = \text{Sine P.F.} / 0.8$
- 2) For voltages other than 480V (Y), 277V (Δ), 240V (YY) at 60 Hz, then kVA must be multiplied by $(480/U)^2$ or $(277/U)^2$ or $(240/U)^2$.

3-phase short-circuit curves at no load and rated speed (star connection Y)


TAL 040 B

Symmetrical —
Asymmetrical - - -

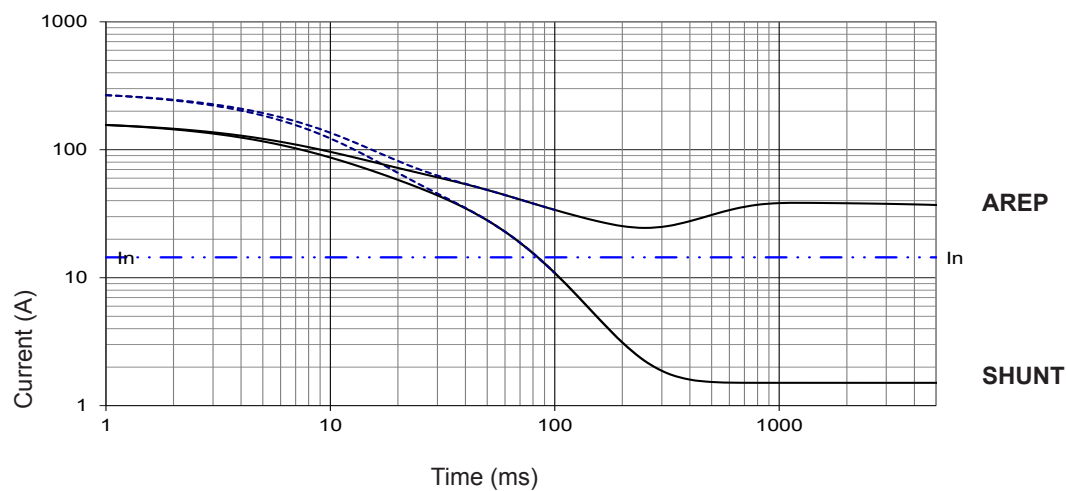


TAL 040 C

Symmetrical —
Asymmetrical - - -

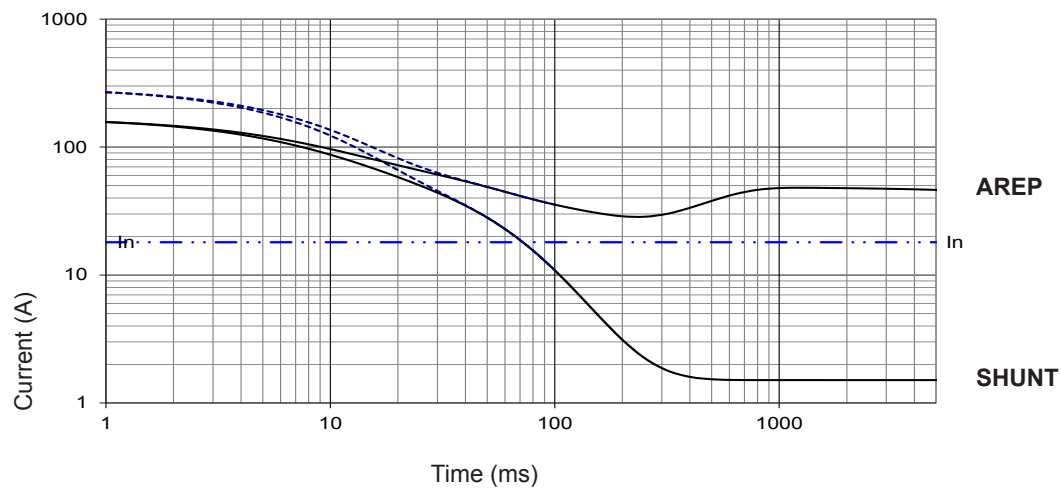

TAL 040 D

Symmetrical —
Asymmetrical - - -

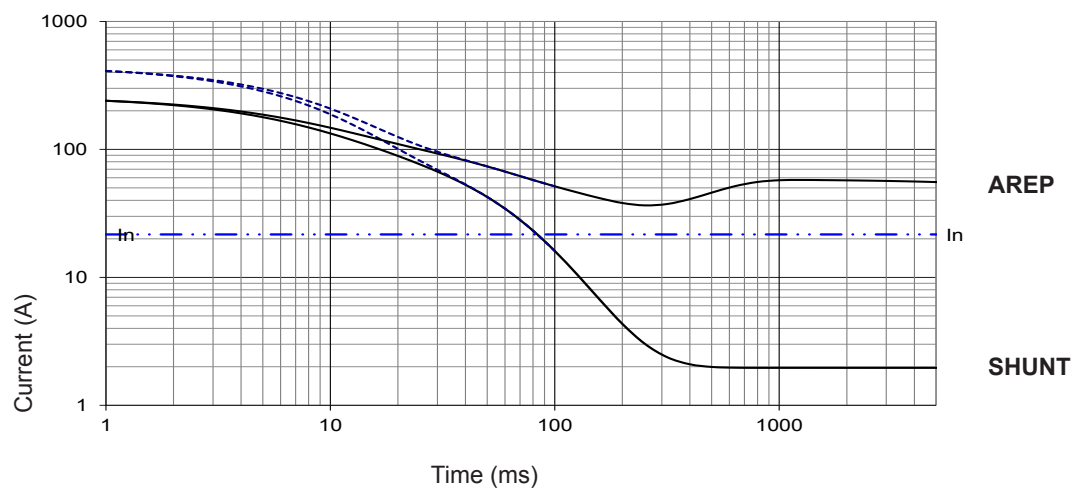


Influence due to connection

For (Δ) connection, use the following multiplication factor:
- Current value x 1.732.

3-phase short-circuit curves at no load and rated speed (star connection Y)


TAL 040 E

Symmetrical —
Asymmetrical - - -

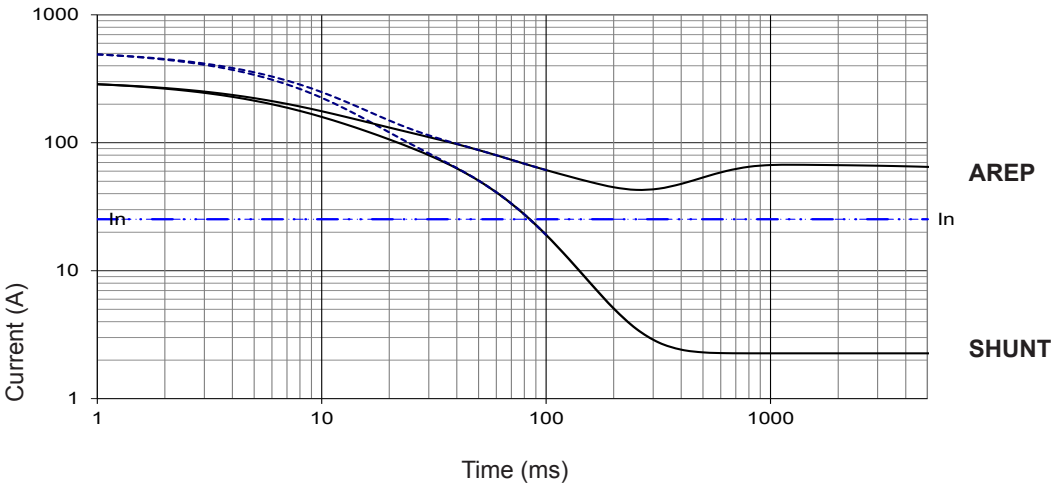

TAL 040 F

Symmetrical —
Asymmetrical - - -

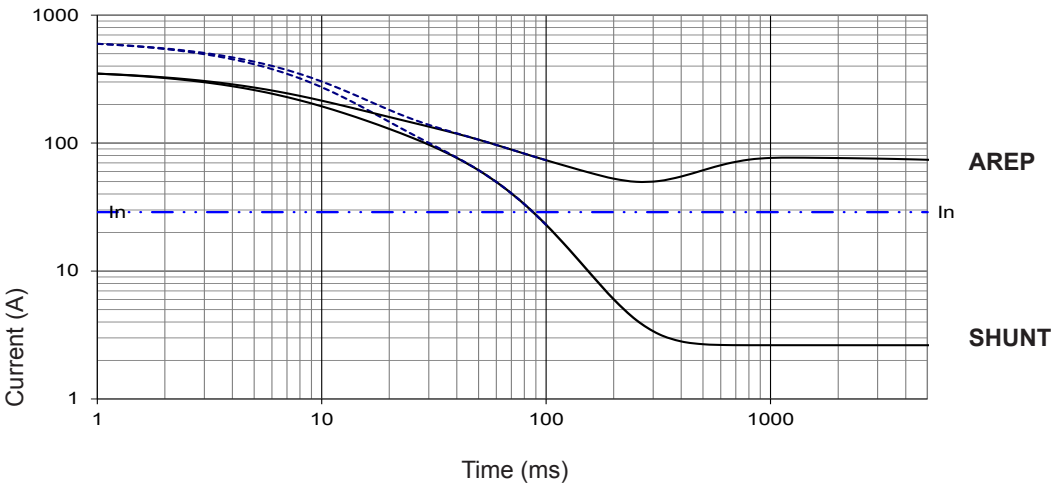

Influence due to short-circuit
Curves are based on a three-phase short-circuit.
For other types of short-circuit,
use the following multiplication factors.

	3 - phase	2 - phase L / L	1 - phase L / N
Instantaneous (max.)	1	0.87	1.3
Continuous	1	1.5	2.2
Maximum duration	1	1.5	

General characteristics

Insulation class	H	Excitation system	SHUNT
Winding pitch	2/3 (wind. M)	AVR type	R121
Number of wires	4	Voltage regulation (*)	± 2 %
Protection	IP 23	Total Harmonic Distortion THD (**) in no-load	< 3.5 %
Altitude	≤ 1000 m	Total Harmonic Distortion THD (**) in linear load	< 5 %
Overspeed	2250 R.P.M.	Waveform: NEMA = TIF (**)	< 100
Air flow (m³/s)	50 Hz: 0.06 - 60 Hz: 0.07	Waveform: I.E.C. = FHT (**)	< 2 %

(*) Steady state (**) Total harmonic distortion between phases, no-load or on-load (non-distorting)

Ratings / Efficiencies 50 Hz - 1500 R.P.M.

kVA / kW - P.F. = 1(*)						
Duty / T° C	Continuous / 40 °C		Continuous / 40 °C	Stand-by / 40 °C	Stand-by / 27 °C	
Class / T° K	H / 125° K		F / 105° K	H / 150° K	H / 163° K	
Serie (SE) 	230 V	η %	230 V	230 V	230V	η %
Parallel (PA) 	115 V	η %	115 V	115 V	115 V	η %
TAL 040 C	10.5	82.4	9.5	11	11.5	81.2
TAL 040 C1	12	84.5	11	12.5	13	83.7
TAL 040 D	13	85.4	12	14	14.5	84.7
TAL 040 E	14.5	86.3	13	15.5	16	85.6
TAL 040 F	16	87.3	14.5	17	17.5	86.7


(*) For P.F. 0.8: derating 15%

Ratings / Efficiencies 60 Hz - 1800 R.P.M.


kVA / kW - P.F. = 1(*)						
Duty / T° C	Continuous / 40 °C		Continuous / 40 °C	Stand-by / 40 °C	Stand-by / 27 °C	
Class / T° K	H / 125° K		F / 105° K	H / 150° K	H / 163° K	
Serie (SE) 	240 V	η %	240 V	240 V	240V	η %
Parallel (PA) 	120 V	η %	120 V	120 V	120 V	η %
TAL 040 C	11.5	82.6	10.5	12	12.5	81.7
TAL 040 C1	13.5	84.2	12.5	14.5	15	83.4
TAL 040 D	14.5	85	13	15.5	16	84.3
TAL 040 E	16	85.9	14.5	17	17.5	85.3
TAL 040 F	17.5	86.9	16	18.5	19.5	86.3

(*) For P.F. 0.8: derating 15%

Starting motor 230V - 50Hz

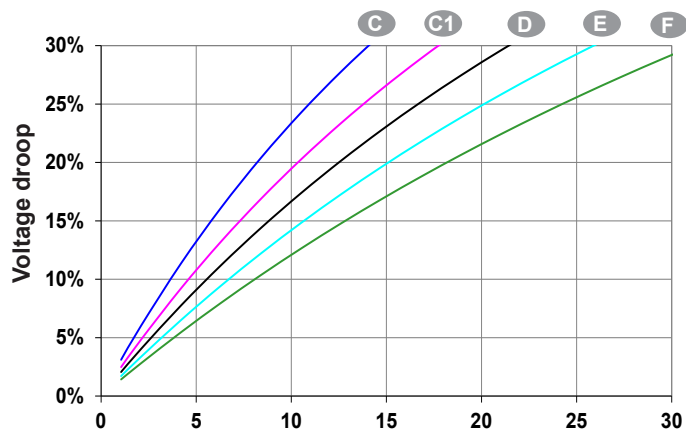


Starting motor 240V - 60Hz

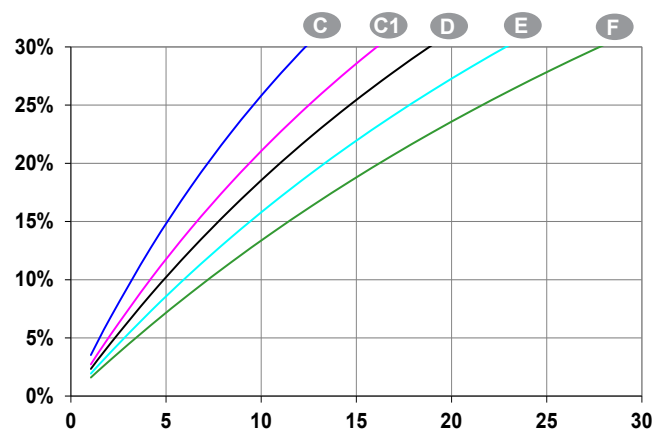

Locked rotor kVA at PF : 0.9

Single bearing general arrangement

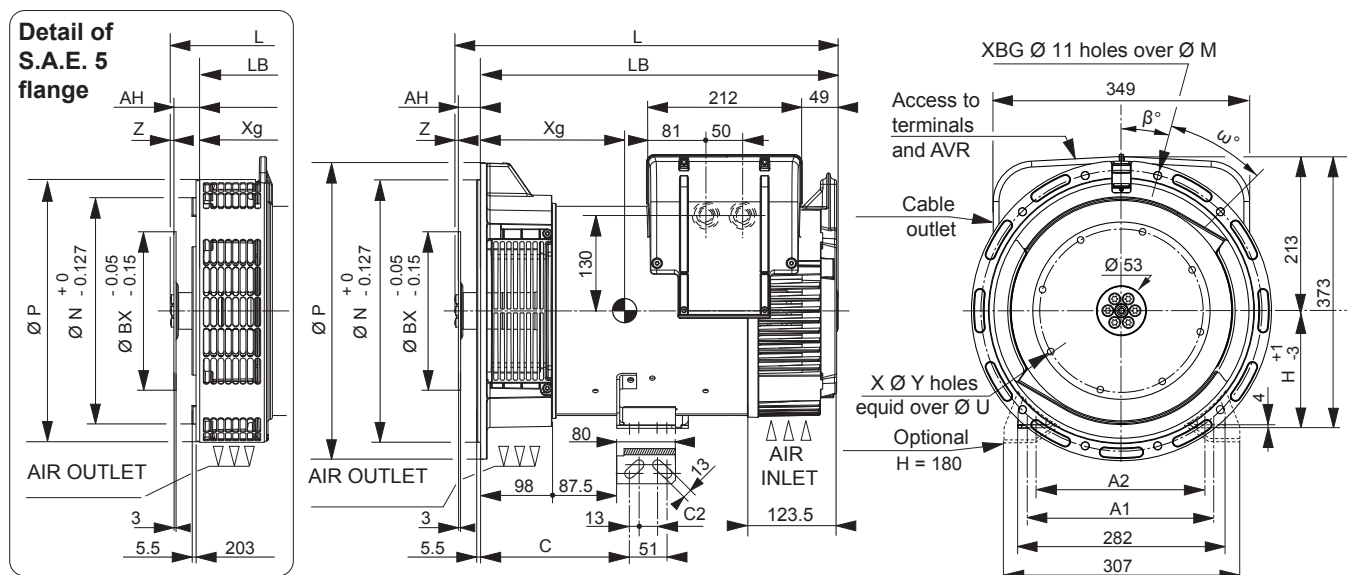

Dimensions (mm) and weight

Type	L maxi	LB	Xg	Weight (kg)
TAL 040 B	469	407	186	73
TAL 040 C	469	407	186	73
TAL 040 C1	469	407	196	80
TAL 040 D	499	437	204	87
TAL 040 E	499	437	221	92
TAL 040 F	519	457	221	102

Lmaxi = LB + AH

Flange (mm)

S.A.E.	P	N	M	XBG	β°	ω°
5	358	314.32	333.38	8	22°30'	45°
4	408	361.95	381	8*	15°	30°
3	460	409.58	428.62	8*	15°	30°
-	-	-	-	-	-	-

*Four lateral holes removal on S.A.E. 3 and 4

Shaft height (mm)

	Standard	Option
H	160	180
Feet length		
C	203	238
C2	25	22
A1	254	279
A2	230	-


Coupling

Flange	3	4	5
Flex plate			
11 1/2	x	-	-
10	x	x	-
8	x	x	-
7 1/2	-	x	x
6 1/2	-	x	x

Flex plate (mm)

S.A.E.	BX	U	X	Y	AH	Z
11 1/2	352.42	333.38	8	11	39.6	0
10	314.32	295.28	8	11	53.8	0
8	263.52	244.48	6	11	62	0
7 1/2	241.3	222.25	8	9	30.2	6
6 1/2	215.9	200.02	6	9	30.2	6

Torsional data

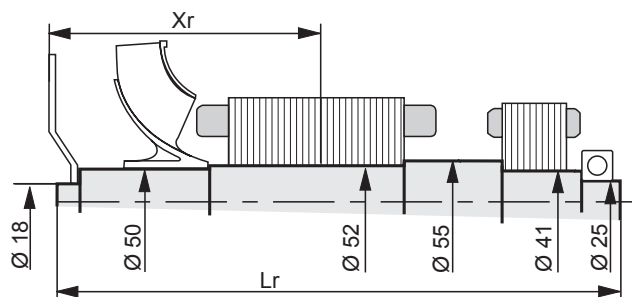

Centre of gravity: Xr (mm), Rotor length: Lr (mm), Weight: M (kg), Moment of inertia: J (kgm²): (4J = MD²)

Flex plate	S.A.E. 6 1/2				S.A.E. 7 1/2				S.A.E. 8				S.A.E. 10			
Type	Xr	Lr	M	J	Xr	Lr	M	J	Xr	Lr	M	J	Xr	Lr	M	J
TAL 040 B	211.7	428	25.5	0.078	211.7	428	25.7	0.080	243.5	428	26	0.085	238.3	428	26.5	0.096
TAL 040 C	211.7	428	25.5	0.078	211.7	428	25.7	0.080	243.5	428	26	0.085	238.3	428	26.5	0.096
TAL 040 C1	221.7	428	27.9	0.087	221.7	428	28.1	0.089	253.5	428	28.4	0.094	248.3	428	28.9	0.105
TAL 040 D	229.2	458	30.3	0.094	229.2	458	30.5	0.096	261	458	30.8	0.100	255.8	458	31.3	0.112
TAL 040 E	236.7	458	32.2	0.100	236.7	458	32.4	0.103	268.5	458	32.7	0.107	263.3	458	33.2	0.119
TAL 040 F	246.7	478	35.3	0.110	246.7	478	35.4	0.113	278.5	478	35.7	0.117	273.3	478	36.2	0.129

NOTE : Dimensions are for information only and may be subject to modifications. The torsional analysis of the transmission is imperative. All values are available upon request.

LEROY-SOMERTM

www.leroy-somer.com/epg

[Linkedin.com/company/Leroy-Somer](https://www.linkedin.com/company/Leroy-Somer)
[Twitter.com/Leroy_Somer_en](https://twitter.com/Leroy_Somer_en)
[Facebook.com/LeroySomer.Nidec.en](https://www.facebook.com/LeroySomer.Nidec.en)
[YouTube.com/LeroySomerOfficiel](https://www.youtube.com/LeroySomerOfficiel)



Nidec
All for dreams

© Nidec 2018. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Nidec have an ongoing process of development and reserve the right to change the specification of their products without notice.

Moteurs Leroy-Somer SAS. Siège : Bd Marcellin Leroy, CS 10015, 16915 Angoulême Cedex 9, France.
Capital social : 65 800 512 €, RCS Angoulême 338 567 258.