

4016-61TRG

1500 rpm

Derate


4000

Series

4016-61TRG1 @ 1500 rpm

Derate for high intake temperature and / or elevated altitude from ISO 3046 standard conditions, applies to tropical and temperate builds where applicable.

4016-61TRG1 1500 rev/min Non-Ems derate for high air temperature. And/or elevated altitude from ISO 3046 standard conditions. June 2010

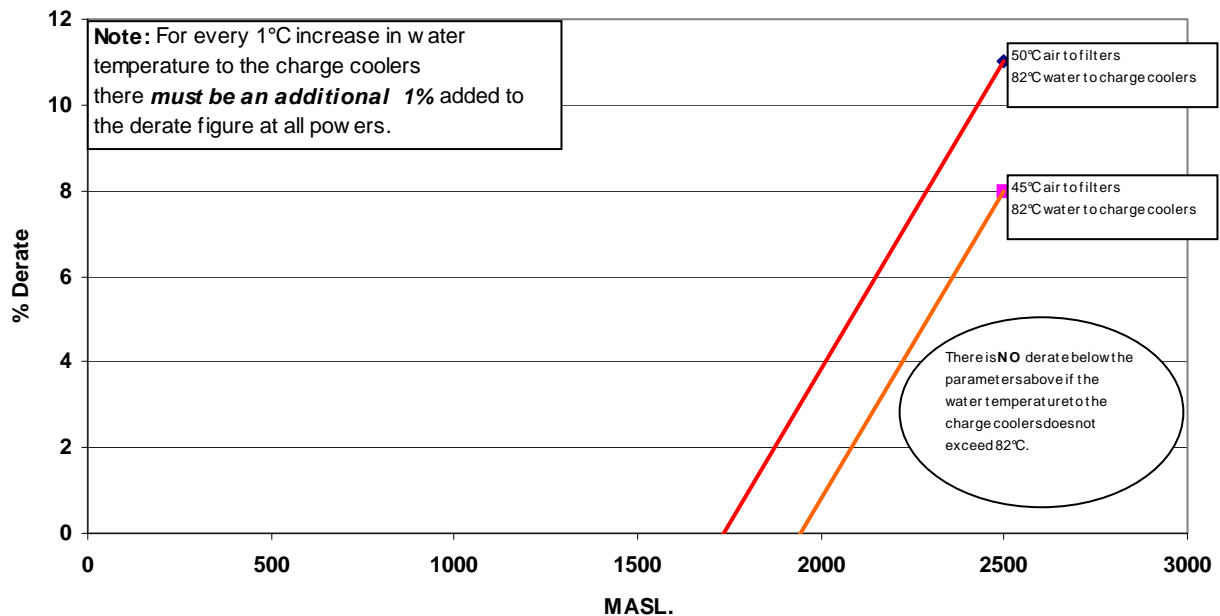


Note: Ambient temperature at air cleaner inlet.

4016-61TRG2 @ 1500 rpm

Derate for high intake temperature and / or elevated altitude from ISO 3046 standard conditions, applies to tropical and temperate builds where applicable.

4016-61TRG2 1500 rev/m in Non-Em s derate for high air temperature. And/or elevated altitude from ISO 3046 standard conditions. June 2010

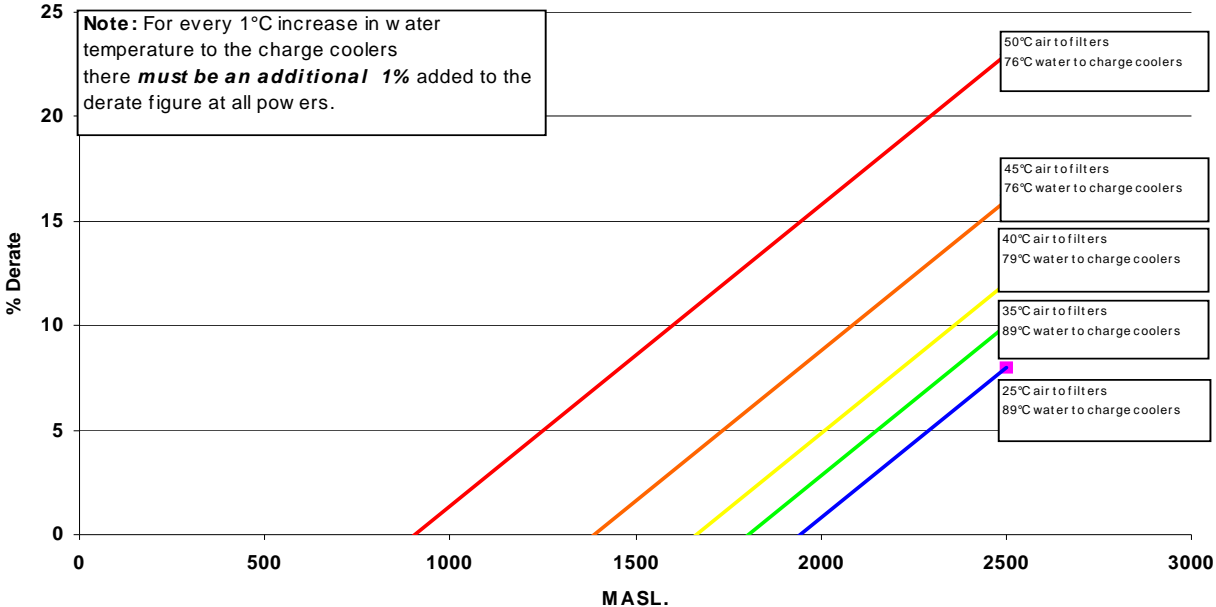


Note: Ambient temperature at air cleaner inlet.

4016-61TRG3 @ 1500 rpm

Derate for high intake temperature and / or elevated altitude from ISO 3046 standard conditions, applies to tropical and temperate builds where applicable.

**4016-61TRG3 1500 rev/min Non-Ems derate for high air temperature.
And/or elevated altitude from ISO 3046 standard conditions. June 2010**

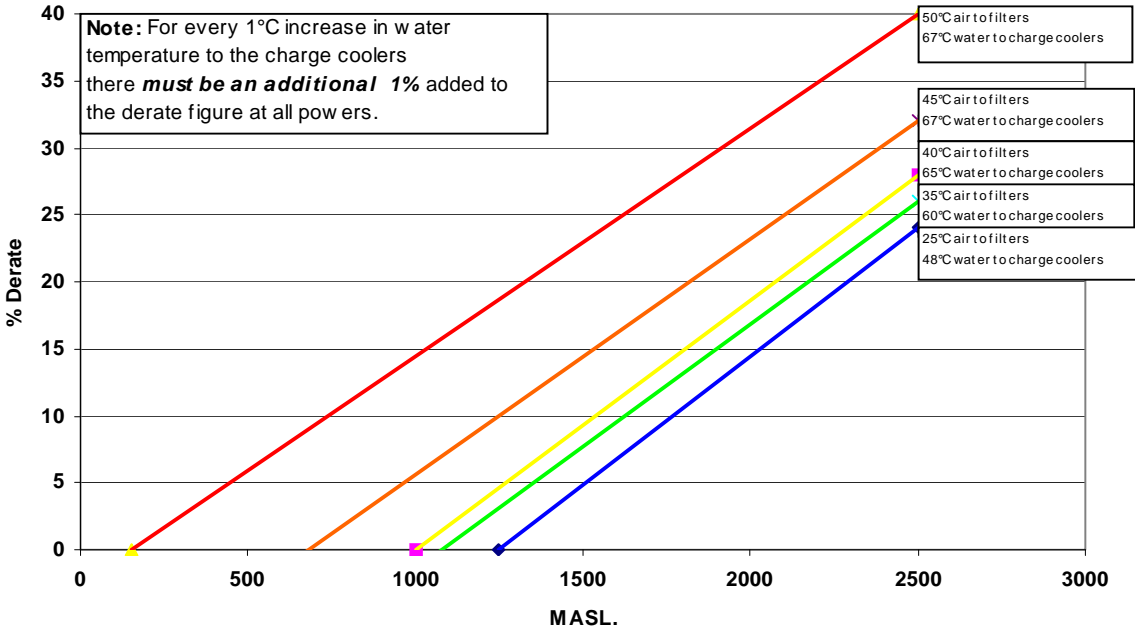

Note: Ambient temperature at air cleaner inlet.