



MP220E

Since 1994 Marapco Generating Sets have provided reliable, dependable and trustworthy power solutions for the global market. Marapco Generating Sets combine quality and performance to deliver a superior product, making Marapco a market leading Generating Set throughout the Middle East, Asia & Africa.

Generator Output	Rating at -	50H	z
400V	KVA		KW
Prime	200.0		160.0
Standby	220.0		176.0
			@ 0.8 p.f.
Generator Output	Rating at -	60H	Z
480V	KVA		KW
Prime	N/A		N/A
Standby	N/A		N/A
			@ 0.8 p.f.
Engine Data			
Engine Data Engine Manufacture	r: Pe	rkins	UK
	_	rkins 5A-70	-
Engine Manufacture	1106		-
Engine Manufacture	1106	6A-70°	TAG4
Engine Manufacture Engine Model: Number of Cylinders	1106 : nt: Vert	6 6	TAG4
Engine Manufacturer Engine Model: Number of Cylinders Cylinder Arrangemer	1106 : nt: Vert	6 6 ical In Strol	TAG4
Engine Manufacture Engine Model: Number of Cylinders Cylinder Arrangemer Cycle:	1106 : nt: Vert 4 : 105.0 (4. Turbo cha	6 6 ical In Strok	TAG4 Line Ke 35.0 (5.3) & air-to-air
Engine Manufacture Engine Model: Number of Cylinders Cylinder Arrangemer Cycle: Bore/Stroke mm (in).	1106 : nt: Verti 4 : 105.0 (4. Turbo cha Chai	6 6 ical In Strok	TAG4 Line Ke 35.0 (5.3) & air-to-air

General Data			
	Liter	US/Gal	
Fuel Tank Capacity:	400.0	116.2	
Fuel Tank:	Powder Coated Steel		
Base Frame:	Heavy Duty-Powder Coated		
Control Panel:	Deep Sea Electronics		
Circuit Breaker:	ABB 3 Pole MCB		

50Hz		60HZ	
1500	1500		00
kWm	Bhp	kWm	Bhp
183.6	246.0	N/A	N/A
202.0	270.0	N/A	N/A
L/Hr	US Gal/Hr	L/Hr	US Gal/Hr
45.8	12.1	N/A	N/A
49.4	13.1	N/A	N/A
	1500 kWm 183.6 202.0 L/Hr 45.8	1500 kWm Bhp 183.6 246.0 202.0 270.0 L/Hr us Gal/Hr 45.8 12.1	1500 18 kWm Bhp kWm 183.6 246.0 N/A 202.0 270.0 N/A L/Hr Us Gal/Hr L/Hr 45.8 12.1 N/A

Standard Reference Conditions:

Output ratings are presented at normal conditions of temperature and pressure. This generator set is designed to operate in high ambient temperatures and altitudes.

Please consult your dealer for specific site ratings.

Dimensions and Weights

Len	gth	Wid	lth	Hei	ght		Pry	\	Vet
Centimeter	Inch	Centimeter	Inch	Centimeter	Inch	KG	LB	KG	LB
269.2	106.0	100.0	39.4	167.0	65.7	1746.0	3849.0	1780.0	3924.0

* With Lube Oil & Coolant

Rating Definition



These rating are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours.



These rating are applicable for supply continuous electrical power (at variable load) in the event of utility power failure. No *overload is permitted on these ratings. The* alternator model is peak continuous rated (as *defined in ISO 8528-3*)

Air Flow	50Hz	60Hz
	M³/min Ft³/min	M³/min Ft³/min
Combustion Air Flow:	13.2 466.1	N/A N/A
Exhaust Gas Flow:	36.8 1299.5	N/A N/A
Radiator Cooling: Air Flow	164.0 5791.0	N/A N/A

^{*}Cooling system designed to operate in high ambient conditions

Alternator Data

Alternator Manufacturer: Leroy Somer Alternator Model: LSA44.3VL14 | TALO44M **Number of Bearings:** Single (1) **Insulation Class:** Н **Total Harmonic Content:** < 5% | < 5% Wires: 12 | 6 **Ingress Protection Rating: IP 23 Excitation System:** Shunt



Winding Pitch Code:

Perkins manufactures diesel engines and power solutions to the highest levels of performance and reliability. MARAPCO incorporates this engine throughout their full range.

2/3 - 6




Leroy Somer is a world leader in the manufacturing of power generation, combining quality with performance to produce a market leading alternator for MARAPCO.



Deep Sea Electronics control modules deliver unrivaled functionality and performance. MARAPCO generating sets use this latest technology to its full potential.

 $Logos\ and\ Brands\ of\ Perkins,\ Leroy\ Somer,\ ABB\ \&\ Deep\ Sea\ Electronics\ \ are\ registered\ Trademarks$

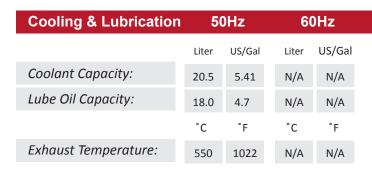



Other Information

Generating Set Standards

This generating set meets the following standards: ISO8528, BS4999, BS5514, IEC60034, VDE0530

Warranty

This generator is covered against manufacturing and workmanship defects. Kindly refer to warrant statement for more details.

Picture shown in leaflet may include optional accessories

Distributed & Serviced by:



7-2015 REV.1