



MP1375E

Since 1994 Marapco Generating Sets have provided reliable, dependable and trustworthy power solutions for the global market. Marapco Generating Sets combine quality and performance to deliver a superior product, making Marapco a market leading Generating Set throughout the Middle East, Asia & Africa.

Generator Outp	out Rating at	- 50Hz		
400V	KVA	KW		
Prime	1250.0	1000.0		
Standby	1375.0	1100.0		
		@ 0.8	p.f.	
Generator Outp	out Rating at	- 60Hz		
480V	KVA	KW		
Prime	N/A	N/A		
Standby	N/A	N/A		
		@ 0.8	p.f.	
Engine Data				
Engine Manufacturer: Perkins UK				
Engine Manufact	urer:	Perkins UK		
Engine Manufact		Perkins UK 12-46TWG2A		
	40			
Engine Model:	40 lers:	12-46TWG2A		
Engine Model: Number of Cylind	40 lers:	12-46TWG2A 12		
Engine Model: Number of Cylind Cylinder Arranger	40 lers: ment:	12-46TWG2A 12 60 Vee		
Engine Model: Number of Cylind Cylinder Arranger Cycle:	40 lers: ment: (in): 160.0 Turbo cha	12-46TWG2A 12 60 Vee 4 Stroke	ed	
Engine Model: Number of Cylind Cylinder Arranger Cycle: Bore/Stroke mm	40 lers: ment: (in): 160.0 Turbo cha	12-46TWG2A 12 60 Vee 4 Stroke (6.3) / 190.0 (7.5) arged & water cool	ed	

General Data			
	Liter	US/Gal	
Fuel Tank Capacity:	N/A	N/A	
Fuel Tank:	N/	'A	
Base Frame:	Heavy Duty-Po	owder Coated	
Control Panel:	Deep Sea Electronics		
Circuit Breaker:	ABB 3 Pole ACB		
Circuit Breaker.	ABB 3 PC	DIE ACB	

Performance	50Hz	!	60HZ	
Engine Speed:	1500		1800	
Gross Engine Power:	kWm	Bhp kW	Vm Bhp	
Prime:	1108.0 14	485.0 N,	/A N/A	
Standby:	1219.0 10	634.7 N,	/A N/A	
Fuel Consumption:	L/Hr us	S Gal/Hr L/	Hr US Gal/Hr	
Prime:	255 6	57.3 N,	/A N/A	
Standby:	283 7	74.7 N,	/A N/A	

Standard Reference Conditions:

Output ratings are presented at normal conditions of temperature and pressure. This generator set is designed to operate in high ambient temperatures and altitudes.

Please consult your dealer for specific site ratings.

Dimensions and Weights

Len	gth	Wid	dth	Hei	ght	[Dry		Wet
Centimeter	Inch	Centimeter	Inch	Centimeter	Inch	KG	LB	KG	LB
455.3	179.2	197.4	77.7	241.0	95.0	8740.0	19268.0	9100.0	20063.0

* With Lube Oil & Coolant

Rating Definition



These rating are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours.



These rating are applicable for supply continuous electrical power (at variable load) in the event of utility power failure. No *overload is permitted on these ratings. The* alternator model is peak continuous rated (as *defined in ISO 8528-3*)

Air Flow	50Hz	60Hz
	M³/min Ft³/min	M³/min Ft³/min
Combustion Air Flow:	106.0 3743	N/A N/A
Exhaust Gas Flow:	244.0 8616	N/A N/A
Radiator Cooling: Air Flow	1662.0 58692	N/A N/A

^{*}Cooling system designed to operate in high ambient conditions

Alternator Data

Alternator Manufacturer:	Leroy Somer
Alternator Model:	LSA50.2 M6
Number of Bearings:	Single (1)
Insulation Class:	Н
Total Harmonic Content:	<3.5%
Wires:	6
Ingress Protection Rating:	IP 23
Excitation System:	AREP
Winding Pitch Code:	2/3 - 6\$



Perkins manufactures diesel engines and power solutions to the highest levels of performance and reliability. MARAPCO incorporates this engine throughout their full range.




Leroy Somer is a world leader in the manufacturing of power generation, combining quality with performance to produce a market leading alternator for MARAPCO.



Deep Sea Electronics control modules deliver unrivaled functionality and performance. MARAPCO generating sets use this latest technology to its full potential.

 $Logos\ and\ Brands\ of\ Perkins,\ Leroy\ Somer,\ ABB\ \&\ Deep\ Sea\ Electronics\ \ are\ registered\ Trademarks$

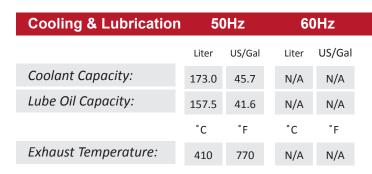



Other Information

Generating Set Standards

This generating set meets the following standards: ISO8528, BS4999, BS5514, IEC60034, VDE0530

Warranty

This generator is covered against manufacturing and workmanship defects. Kindly refer to warrant statement for more details.

Picture shown in leaflet may include optional accessories

Distributed & Serviced by:

JAN2014 VER.1